


FEATURES

- With swirl inserts.
- Non-clogging.
- Stable spray angle.
- Uniform liquid distribution.
- High chemical resistance.

APPLICATIONS

- Surface Spraying
- Cooling
- Cleaning and washing processes
- Foam control

Colour : D. Blue

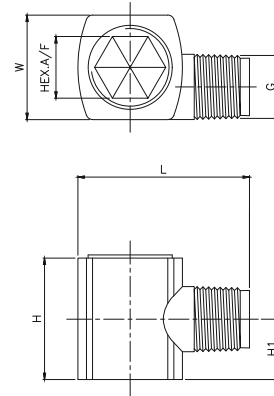

MODEL NO.		FLOW CAPACITY IN LPM AT DIFFERENT PRESSURE						G/A DIMENSION. MM				
SPRAY ANGLE		PRESSURE [BAR]						CONN.	H	H1	HEX	L
90°	120°	0.5	1.0	2.0	3.0	5.0	10.0					
DIB9020	DIB1220	10.00	14.14	20.00	24.49	31.62	44.72	1/2"	38.3	19.4	19	52
DIB9025	DIB1225	12.50	17.68	25.00	30.62	39.53	55.90	Weight = XX gms. Approx				
DIB9032	DIB1232	15.75	22.27	32.00	38.58	49.81	70.44					